


Valve Dimensions

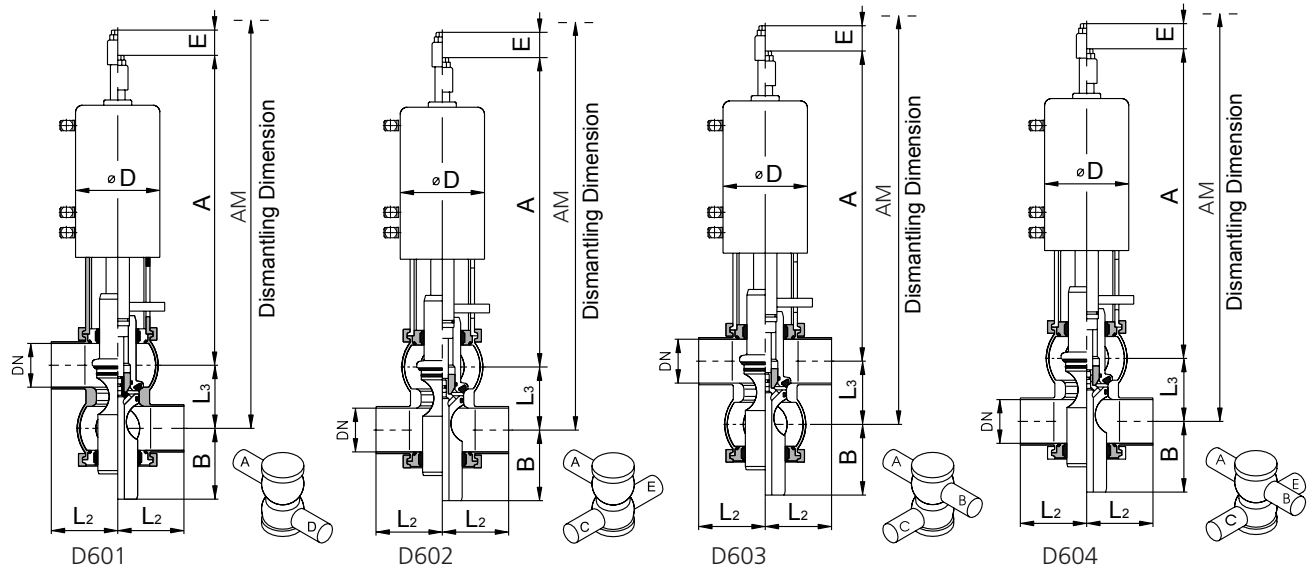

inches	OD-Tube								lbs
	A	B	Ø D	E	L ₂	L ₃	AM		
1.0"	14 ³ / ₈	2 ³ / ₁₆	3 ⁷ / ₁₆	½	3 ¹ / ₈	1 ⁹ / ₁₆	22 ¹³ / ₁₆	26.5	
1.5"	14 ³ / ₄	2 ⁷ / ₈	3 ⁷ / ₁₆	15/16	3 ¹ / ₈	2 ⁷ / ₁₆	25 ⁹ / ₁₆	28.7	
2.0"	15 ³ / ₈	3 ³ / ₈	4 ³ / ₁₆	1 ³ / ₁₆	3 ¹⁵ / ₁₆	3 ¹ / ₈	28 ³ / ₈	28.7	
2.5"	18 ½	4	5	1 ½	3 ¹⁵ / ₁₆	3 ³ / ₄	34 ¹ / ₁₆	39.7	
3.0"	18 ⁷ / ₈	4 ³ / ₈	5	1 ½	4 ³ / ₄	4 ⁵ / ₁₆	35 ¹³ / ₁₆	46.3	
4.0"	19 ¹ / ₈	5	5	1 ³ / ₄	5 ⁷ / ₈	5 ¹ / ₁₆	37 ¹³ / ₁₆	61.7	
6.0"	26 ⁵ / ₁₆	6 ¹³ / ₁₆	7 ⁹ / ₁₆	2 ⁹ / ₁₆	7 ⁷ / ₈	7 ¹ / ₁₆	53 ¹ / ₈	180.8	

Note: Values in fractional inches have been rounded to the nearest 1/16 inch

millimeters	OD-Tube								kgs
	A	B	ØD	E	L ₂	L ₃	AM		
1.0"	365	56	88	13	80	40	580	12	
1.5"	374	73	88	24	80	62	650	13	
2.0"	390	85	107	30	100	79	720	13	
2.5"	470	102	127	38	100	95	865	18	
3.0"	475	111	127	38	120	110	910	21	
4.0"	485	127	127	45	150	129	960	28	
6.0"	675	173	192	65	200	180	1350	82	

Südmo North America, Inc.

1330 Anvil Drive, Rockford, IL 61115 USA

T 815.639.0322 • F 815.639.1135

E info@sudmona.com • I www.sudmona.com

Südmo North America, Inc. reserves the right to make changes in the technical specifications at any time.

D600 Mix Proof Valves

Norit
leading in purification

Südmo