


Valve Dimensions

SVP Select Bottom Seat Valve

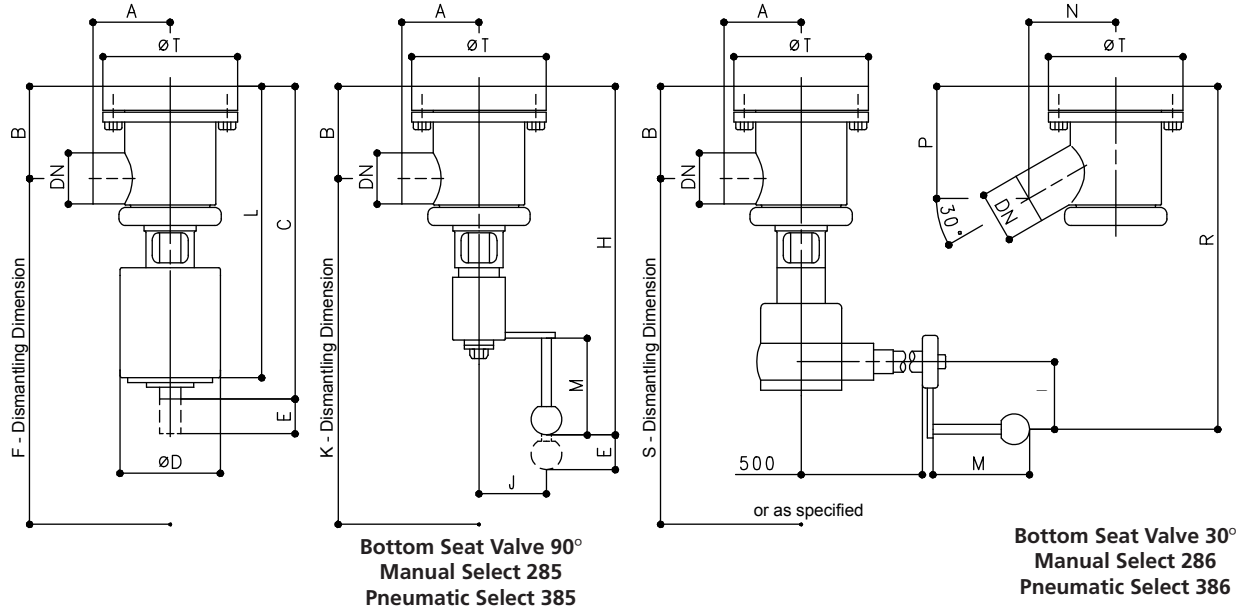

inches

OD-Tube	A	B	C ₁ *	C ₂ *	ØD	E ₁ *	E ₂ *	F ₁ *	F ₂ *	H ₁ *	H ₂ *	J	K ₁ *	K ₂ *	L ₁ *	L ₂ *	M	N	P	R ₁ *	R ₂ *	S ₁ *	S ₂ *	ØT
1.0"	2 3/4	3 3/16	11 7/16	13 1/4	4 1/8	1 3/16	1/2	12 3/8	14 3/8	13 1/4	15 1/16	2 3/4	14 3/8	16 1/8	10 3/4	12 1/2	3 15/16	2 3/4	3 13/16	13 1/4	15 1/16	13 3/8	15 3/16	5 1/8
1.5"	2 3/4	3 5/8	12 1/8	13 7/8	4 1/8	1 3/16	1/2	13 3/16	15 3/8	14	15 3/4	2 3/4	15 3/8	17 1/8	11 7/16	13 3/16	3 15/16	3 1/8	4 7/16	14	15 3/4	14 1/16	16 3/16	5 1/8
2.0"	3 1/8	3 13/16	12 3/8	14 3/16	4 1/8	1	5/8	14 3/16	15 15/16	14 3/16	15 15/16	2 3/4	15 15/16	17 11/16	11 7/8	13 11/16	3 15/16	3 9/16	4 5/8	14 7/16	16 3/16	14 15/16	16 3/4	5 1/2
2.5"	3 3/8	4 1/16	15 1/8	16 7/8	5 1/8	1 3/16	7/8	17 3/16	19 1/8	16 3/16	17 15/16	3 15/16	18 1/2	20 1/4	14 5/8	16 3/8	3 15/16	3 15/16	5 5/8	15 3/8	17 3/16	16 15/16	18 1/8	6 1/16
3.0"	3 15/16	5 3/8	18 3/16	20 1/2	6 1/16	1 9/16	15/16	21 1/16	23 1/16	17 3/16	19 1/4	3 15/16	19 7/8	21 7/8	18 1/16	20	3 15/16	4 3/16	6 3/16	18 7/16	20 7/16	19 3/16	21 1/4	7 1/16
4.0" ³	4 3/4	6 7/16	20	22 3/16	6 1/16	1 1/4	1 1/4	22 3/8	24 13/16	18 3/4	20 7/8	3 15/16	21 5/8	23 13/16	19 1/2	21 5/8	3 15/16	5 1/2	7 7/16	19 15/16	22 1/8	20 7/8	23 3/16	8 1/4

Note: Values in fractional inches have been rounded to the nearest 1/16 inch

millimeters

OD-Tube	A	B	C ₁ *	C ₂ *	ØD	E ₁ *	E ₂ *	F ₁ *	F ₂ *	H ₁ *	H ₂ *	J	K ₁ *	K ₂ *	L ₁ *	L ₂ *	M	N	P	R ₁ *	R ₂ *	S ₁ *	S ₂ *	ØT
1.0"	70	81	291	336	104	20	12	320	365	337	382	70	365	410	273	318	100	70	97	337	382	340	385	129.5
1.5"	70	92	308	353	104	20	12	345	390	355	400	70	390	435	290	335	100	80	112.5	355	400	370	415	129.5
2.0"	80	97	315	360	104	25	16	360	405	360	405	70	405	450	302	347	100	90	118	366	411	380	425	139.5
2.5"	90	116	384	429	129	30	22	440	485	411	456	100	470	515	371	416	100	100	135.5	391	436	415	460	169.5
3.0"	100	137	471	521	154	40	24	535	585	439	489	100	505	555	458	508	100	110	157.5	469	519	490	540	179.5
4.0" ³	120	163	508	563	154	40	31	575	630	476	531	100	550	605	495	550	100	140	189.5	507	562	530	585	209.5

* C₁/E₁/F₁/H₁/K₁/L₁/R₁/S₁: Hygienic execution

* C₂/E₂/F₂/H₂/K₂/L₂/R₂/S₂: Aseptic execution

³ Pneumatic valves spring to open - air to close (87 psi control pressure) standard with booster size II (dimensions see booster)

Südmo North America Inc.

1330 Anvil Drive, Rockford, IL 61115 USA

T 815.639.0322 • F 815.639.1135

E info@sudmona.com • I www.sudmona.com

Südmo North America Inc. reserves the right to make changes in the technical specifications at any time.

2222-0901

SVP Select Bottom Seat

Norit
leading in purification

Südmo