


Valve Dimensions

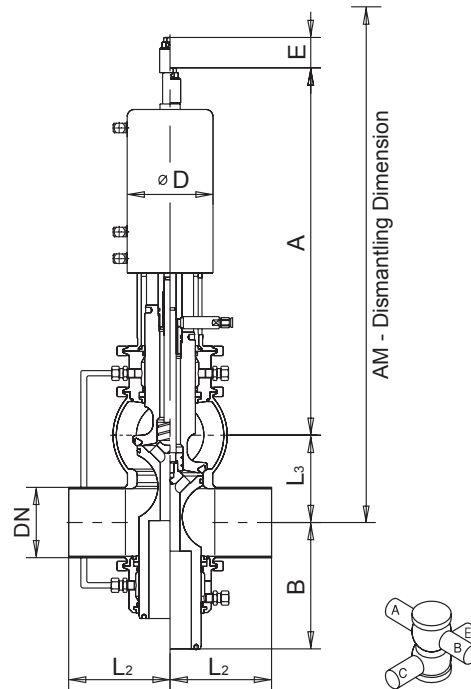

D 624 S-sp

OD-Tube	A	B	ØD	E	L ₂	L ₃	AM	lbs
1.0"	15 15/16	4 1/16	3 7/16	1/2	3 1/8	1 9/16	26	28.7
1.5"	16 15/16	4 1/2	3 7/16	15/16	3 1/8	2 7/16	29 1/8	33.1
2.0"	16 15/16	5 5/16	4 3/16	1 3/16	3 15/16	3 1/8	31 7/8	35.3
2.5"	20 1/2	6 1/8	5	1 1/2	3 15/16	3 3/4	37 13/16	46.3
3.0"	21 1/16	7 1/16	5	1 1/2	4 3/4	4 5/16	40 9/16	55.1
4.0"	22 1/16	7 1/2	5	1 3/4	5 7/8	4 5/16	44 1/16	83.8
6.0"	29 1/2	10 5/8	7 9/16	2 9/16	7 7/8	4 5/16	59 5/8	196.2

Note: Values in fractional inches have been rounded to the nearest 1/16 inch

OD-Tube	A	B	ØD	E	L ₂	L ₃	AM	kgs
1.0"	405	103	88	13	80	40	660	13.0
1.5"	415	115	88	24	80	62	740	15.0
2.0"	430	135	107	30	100	79	810	16.0
2.5"	520	155	127	38	100	95	960	21.0
3.0"	535	180	127	38	120	110	1030	25.0
4.0"	560	190	127	45	150	129	1120	38.0
6.0"	750	270	192	65	200	180	1540	89.0

Südmo North America, Inc.
 1330 Anvil Drive, Rockford, IL 61115 USA
 T 815.639.0322 • F 815.639.1135
 E info@sudmona.com • I www.sudmona.com

Südmo North America, Inc. reserves the right to make changes in the technical specifications at any time.

3121-0901

D624 S-sp Mix Proof Valve