


Valve Dimensions

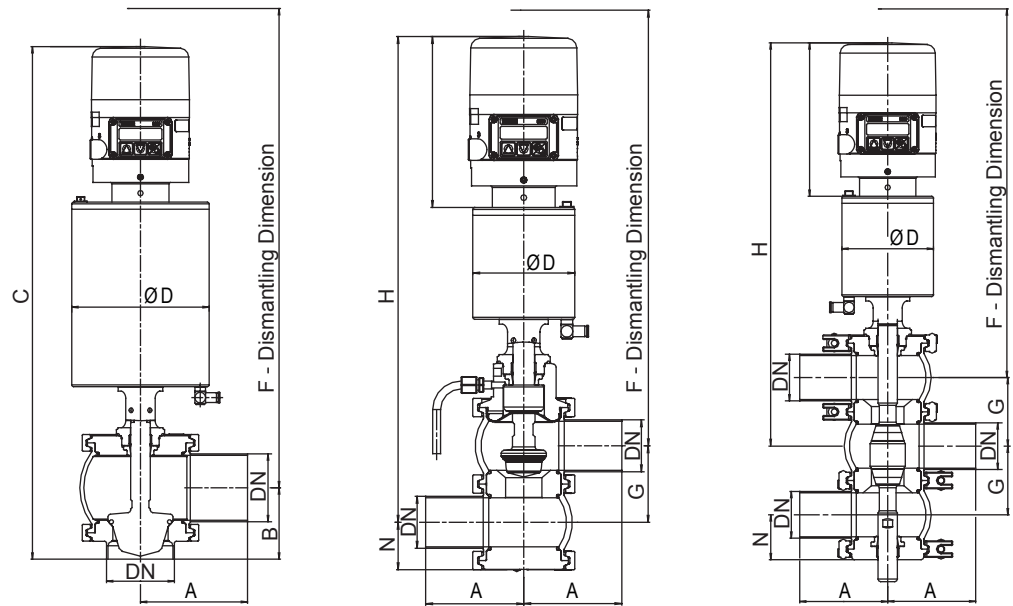

S375 Pneumatically Operated

inches	OD-Tube	A	B	C ₁ *	C ₂ *	ØD	Hub Stroke ₁ *	Hub Stroke ₂ *	F ₁ *	F ₂ *	G	H ₁ *	H ₂ *	N
	1.0"	3 1/8	1 15/16	16 1/2	17 15/16	4 1/8	13/16	1/2	17 1/2	19	2	16 1/2	17 15/16	1 5/16
1.5"	3 1/8	2 3/16	16 7/8	18 5/16	4 1/8	13/16	1/2	18 7/8	19 9/16	2 1/2	17 3/16	18 5/8	1 9/16	
2.0"	3 15/16	2 9/16	17 1/2	18 15/16	4 1/8	13/16	5/8	18 7/8	20 3/8	3	17 15/16	19 3/8	1 13/16	
2.5"	3 15/16	2 3/4	19 3/4	21 1/4	5 1/16	1 3/16	13/16	21 7/8	23 5/16	3 1/2	20 1/2	21 15/16	2 1/16	
3.0"	4 3/4	3 1/8	22 5/8	24 5/16	6 1/16	1 3/16	15/16	25	26 5/8	3 15/16	23 7/16	25 1/8	2 5/16	
4.0"	5 7/8	3 9/16	23 1/2	25 3/8	6 1/16	1 3/16	1 3/16	26 3/8	28 1/4	4 15/16	24 15/16	26 3/4	2 13/16	

Note: Values in fractional inches have been rounded to the nearest 1/16 inch

millimeters	OD-Tube	A	B	C ₁ *	C ₂ *	ØD	Hub Stroke ₁ *	Hub Stroke ₂ *	F ₁ *	F ₂ *	G	H ₁ *	H ₂ *	N
	1.0"	80	50	419	456	104	20	12	445	482	50.1	419	456	34
1.5"	80	55	428	465	104	20	12	460	497	62.8	436	473	40.4	
2.0"	100	65	444	481	104	20	16	480	517	75.5	455	492	46.8	
2.5"	100	70	502	539	154	30	20	555	592	88.2	520	557	53.1	
3.0"	120	80	575	617	154	30	24	635	677	100.8	596	638	59.4	
4.0"	150	90	597	644	154	30	30	670	717	125.4	633	680	71.7	

*C₁ / E₁ / F₁ / H₁ / Hub/Stroke₁: Hygienic execution

*C₂ / E₂ / F₂ / H₂ / Hub/Stroke₂: Aseptic execution

Südmo North America, Inc.

1330 Anvil Drive, Rockford, IL 61115 USA

T 815.639.0322 • F 815.639.1135

E info@sudmona.com • I www.sudmona.com

Südmo North America, Inc. reserves the right to make changes in the technical specifications at any time.

5121-0901

Select Regulating Valves

Norit
leading in purification

Südmo