


Valve Dimensions

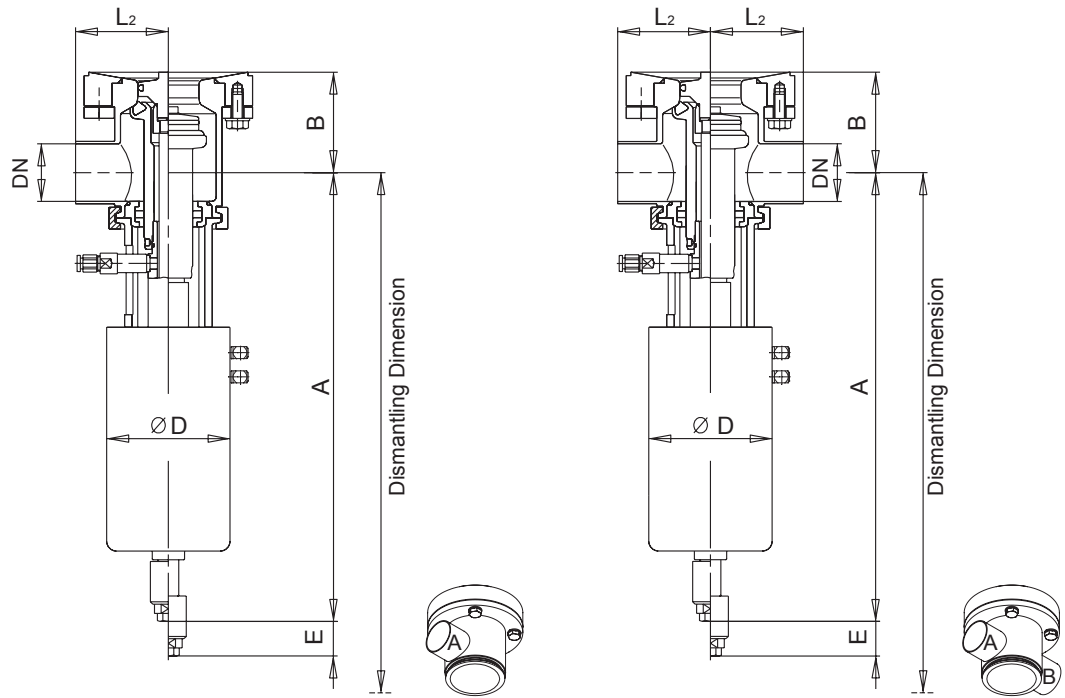

D 640 O

D 641 O

| inches | OD-Tube | A | B | ØD | E | L ₂ | AM | lbs |
|--------|-------------------|----------|--------|--------|---------|----------------|---------|------|
| | 1.5" | 15 1/16 | 3 3/4 | 4 3/16 | 1 3/16 | 3 1/8 | 22 1/16 | 35.3 |
| | 2.0" | 15 1/4 | 3 1/2 | 4 3/16 | 1 3/16 | 3 1/8 | 22 1/16 | 35.3 |
| | 2.5" | 18 3/8 | 4 | 5 | 1 1/2 | 3 3/4 | 26 3/8 | 50.7 |
| | 3.0" | 22 5/16 | 4 1/16 | 6 1/4 | 1 15/16 | 4 1/2 | 31 1/2 | 61.7 |
| | 4.0" ¹ | 22 13/16 | 5 3/16 | 6 1/4 | 1 15/16 | 4 3/4 | 32 1/2 | 75.0 |

Note: Values in fractional inches have been rounded to the nearest 1/16 inch

| millimeters | OD-Tube | A | B | ØD | E | L ₂ | AM | kgs |
|-------------|-------------------|-----|------|-----|----|----------------|-----|-----|
| | 1.5" | 382 | 94.5 | 107 | 30 | 80 | 560 | 16 |
| | 2.0" | 388 | 88.5 | 107 | 30 | 80 | 560 | 16 |
| | 2.5" | 467 | 101 | 127 | 38 | 95 | 670 | 23 |
| | 3.0" | 566 | 119 | 159 | 50 | 115 | 800 | 28 |
| | 4.0" ¹ | 579 | 132 | 159 | 50 | 120 | 825 | 34 |

¹Operating Pressure 72 PSI maximum
Leakage free switching
Liftable seats

Südmo North America, Inc.

1330 Anvil Drive, Rockford, IL 61115 USA

T 815.639.0322 • F 815.639.1135

E info@sudmona.com • I www.sudmona.com

Südmo North America, Inc. reserves the right to make changes in the technical specifications at any time.

Mix Proof Bottom Valves