


Valve Dimensions

Right Angle/Double Right Angle & Ring Mains Mix Proof Valves

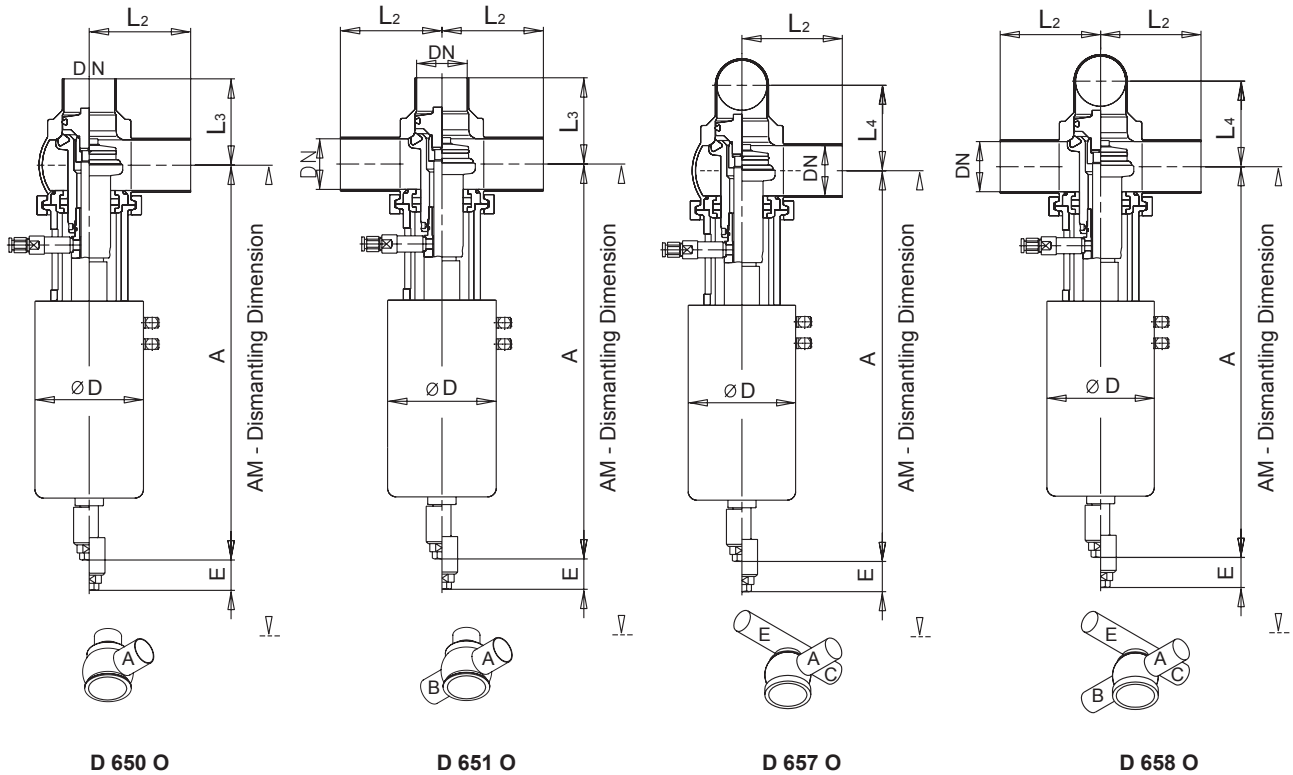

inches									lbs
	OD-Tube	A	ØD	E	L ₂	L ₃	L ₄	AM	
2.0"	14	14 1/16	4 3/16	1 3/16	3 15/16	2 15/16	3 3/8	21 5/8	22.0
2.5"	18	18 1/2	5	1 1/2	3 15/16	2 15/16	3 15/16	25 9/16	35.2
3.0"	22	22 7/16	6 1/4	1 15/16	4 3/4	4 1/2	4 1/2	31 1/8	50.7
4.0" ¹	22	22 13/16	6 1/4	1 15/16	5 7/8	5 1/2	5 1/2	33 7/16	70.5

Note: Values in fractional inches have been rounded to the nearest 1/16 inch

millimeters									kgs
	OD-Tube	A	ØD	E	L ₂	L ₃	L ₄	AM	
2.0"	370	370	107	30	100	75	85	550	10
2.5"	470	470	127	38	100	75	100	650	16
3.0"	570	570	159	50	120	115	115	790	23
4.0" ¹	580	580	159	50	150	140	140	850	32

¹Operating Pressure 72.5 psi max

Leak-free switching
Liftable seats

Südmo North America, Inc. reserves the right to make changes in the technical specifications at any time.

Südmo North America, Inc.

1330 Anvil Drive, Rockford, IL 61115 USA

T 815.639.0322 • F 815.639.1135

E info@sudmona.com • I www.sudmona.com

D650 Mix Proof Valves