


Valve Dimensions

PMO Mix Proof Valves

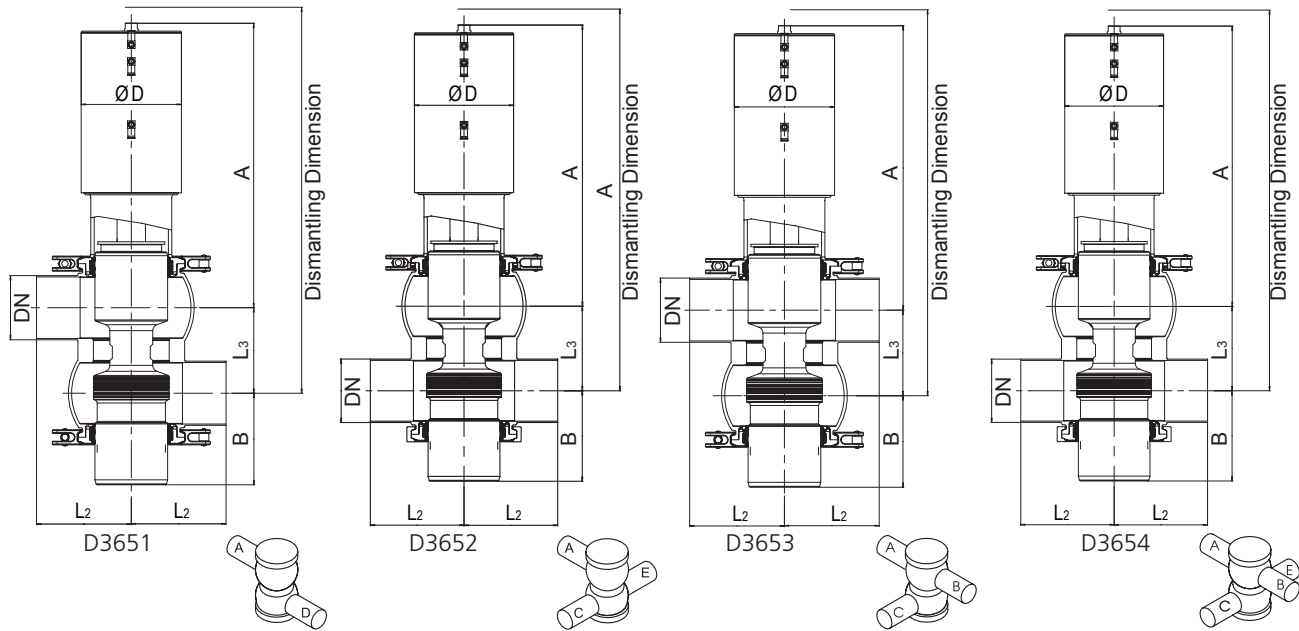

	OD-Tube	A	B	Ø D	Stroke	L ₂	L ₃	AM	lbs
inches	1.5"	18 13/16	1 7/8	4 1/2	1 5/8	4 7/8	3 1/16	29 5/16	
	2.0"	18 13/16	1 7/8	4 1/2	1 5/8	3 15/16	3 1/16	29 5/16	53.2
	2.5"	18 1/16	3	5 1/4	1 15/16	4 15/16	3 7/8	29 13/16	76
	3.0"	18 5/16	2 3/4	5 1/4	1 15/16	4 15/16	4 3/8	31 1/8	78
	4.0"	23 1/4	3 7/16	6 1/4	2 1/4	5 7/8	5 5/16	37 5/8	142
	6.0"	27 1/2	4 9/16	10 5/8	2 3/4	7 7/8	7 1/2	56 1/16	

Note: Values in fractional inches have been rounded to the nearest 1/16 inch

	OD-Tube	A	B	Ø D	Stroke	L ₂	L ₃	AM	kg
millimeters	1.5"	478	48	115	41	124	94	744	
	2.0"	478	48	445	41	100	94	744	24.13
	2.5"	458	76	133	49	125	98	758	34.47
	3.0"	465	70	133	49	125	111	791	35.38
	4.0"	591	88	159	57	150	135	955	64.41
	6.0"	698	116	270	70	200	190	1440	

Südm North America, Inc.

1330 Anvil Drive, Rockford, IL 61115 USA

T 815.639.0322 • F 815.639.1135

E info@sudmona.com • I www.sudmona.com

Südm North America, Inc. reserves the right to make changes in the technical specifications at any time.

PMO Mix Proof Valves