


Valve Dimensions

SVP Select Hygienic Changeover Valve

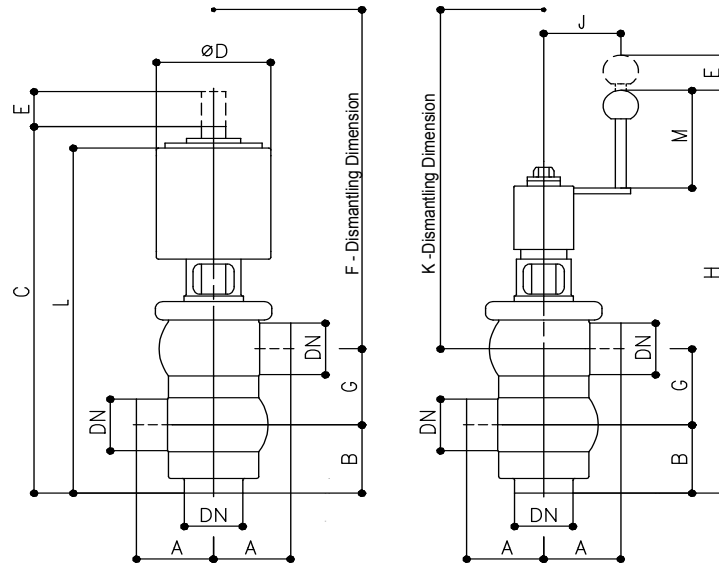

Changeover Valve 3x Welding End

Manual Pneumatic	Select S 290 Select S 390
---------------------	------------------------------

inches	OD-Tube	A	B	C	ØD	E	F	G	H	J	K	L	M
	1.0"	3 1/8	1 15/16	12 3/16	4 1/8	1 3/16	12 3/8	2	14	2 3/4	14	11 1/2	3 15/16
	1.5"	3 1/8	2 3/16	13 1/8	4 1/8	1 3/16	13 3/8	2 1/2	14 15/16	2 3/4	15 3/8	12 7/16	3 15/16
	2.0"	3 15/16	2 9/16	14 1/8	4 1/8	1	14 9/16	3	15 15/16	2 3/4	16 5/16	13 9/16	3 15/16
	2.5"	3 15/16	2 3/4	16 3/4	5 1/16	1 3/16	17 11/16	3 1/2	17 13/16	3 15/16	18 11/16	16 1/4	3 15/16
	3.0"	4 3/4	3 1/8	20 1/4	6 1/16	1 9/16	21 1/4	3 15/16	19	3 15/16	19 7/8	19 3/4	3 15/16
	4.0"	5 7/8	3 9/16	22 1/16	6 1/16	1 9/16	22 1/4	4 15/16	20 13/16	3 15/16	22 1/4	21 9/16	3 15/16

Note: Values in fractional inches have been rounded to the nearest 1/16 inch

millimeters	OD-Tube	A	B	C	ØD	E	F	G	H	J	K	L	M
	1.0"	80	50	310	104	20	315	50.1	356	70	355	292	100
	1.5"	80	55	334	104	20	340	62.8	380	70	390	316	100
	2.0"	100	65	358	104	25	370	75.5	405	70	415	345	100
	2.5"	100	70	426	129	30	450	88.2	453	100	475	413	100
	3.0"	120	80	514	154	40	540	100.8	483	100	505	501	100
	4.0" ¹	150	90	561	154	40	565	125.4	529	100	565	548	100

¹Pneumatic valves standard with booster size II (dimensions see booster)

Südmo North America Inc.

1330 Anvil Drive, Rockford, IL 61115 USA

T 815.639.0322 • F 815.639.1135

E info@sudmona.com • I www.sudmona.com

Südmo North America Inc. reserves the right to make changes in the technical specifications at any time.

2231-0901

SVP Select Changeover